


Fixed height with vertical outlet - Square top

Product information for the product group

ACO Product benefits

- Fully inspectable and cleanable
- Fully removable and easily cleanable stainless steel foul air trap (FAT)
- Full drainability
- Internal radii equal or larger than 3 mm
- Fully welded hygienic joints
- Steel thickness min. 1,5 mm
- Edge infill
- ACO protective cover available
- Fully pickled and passivated

- BIM models are available in ACO Building Drainage BIM Revit libraries
- Certified according to EN 1253-1
- Hygienic design following EN 1672, EN ISO 14159 and EHEDG document 8, 13 and 44
- Available in 1.4301 (304) or 1.4404 (316L) grades of stainless steel
- Adjustable EasyFix leveling feet
- Wide range of gratings for various load classes including slip resistant solutions
- Certified fire protective solution available for classes EI 90 – EI 180 (EN 13 501-2)
- Silt basket available as accessory

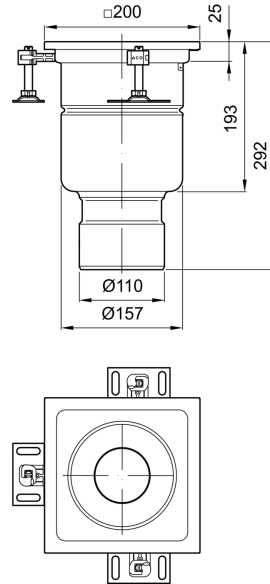










Item Technical Data 408003





Gully top dimensions [mm]	Outlet diameter Ø [mm]	Odour trap	Flow rate EN 1253-1 / Direct * [l/s]	Material
200 x 200	110	With	3.5 / 4.5	1.4301

Standard edge

Accessories

	Description	Used with	Weight [kg]	Item number
	<p>ACO Easy FAT Replacement sealing ring: Optional compatible silt baskets:</p> <ul style="list-style-type: none"> ■ 416906 (1.4301) ■ 416907 (1.4404) 	<ul style="list-style-type: none"> ■ ACO gully 157, fixed height 	0.89	
	<p>BenefitsUser-friendly installation and maintenance; Complete ease in removing and cleaning; Minimum steel thickness of 1.2 mm; Fully pickled and passivated; Extensively tested and classified in accordance with EN 1253-1 guidelines-FeaturesMaximum flow rate with horizontal gully: 2.6 l/s; Maximum flow rate with vertical gully: 2.6 l/s; Material: 1.4301; Silt basket not included</p>			449681
	<p>BenefitsUser-friendly installation and maintenance; Complete ease in removing and cleaning; Minimum steel thickness of 1.2 mm; Fully pickled and passivated; Extensively tested and classified in accordance with EN 1253-1 guidelines-FeaturesMaximum flow rate with horizontal gully: 2.6 l/s; Maximum flow rate with vertical gully: 2.6 l/s; Material: 1.4404; Silt basket not included</p>			449683
	<p>ACO Easy FAT Replacement sealing ring:</p>	<ul style="list-style-type: none"> ■ ACO gully 157, fixed height 	1.09	
	<p>BenefitsUser-friendly installation and maintenance; Complete ease in removing and cleaning; Minimum steel thickness of 1.2 mm; Fully pickled and passivated; Extensively tested and classified in accordance with EN 1253-1 guidelines-FeaturesMaximum flow rate with horizontal gully: 2.4 l/s; Maximum flow rate with vertical gully: 2.4 l/s; Material: 1.4301; Silt basket included</p>			449682
	<p>BenefitsUser-friendly installation and maintenance; Complete ease in removing and cleaning; Minimum steel thickness of 1.2 mm; Fully pickled and passivated; Extensively tested and classified in accordance with EN 1253-1 guidelines-FeaturesMaximum flow rate with horizontal gully: 2.4 l/s; Maximum flow rate with vertical gully: 2.4 l/s; Material: 1.4404; Silt basket included</p>			449684
	<p>Silt basket</p> <ul style="list-style-type: none"> ■ Stainless steel ■ 0,6 litre capacity 	<ul style="list-style-type: none"> ■ ACO gully 157 - vertical <ul style="list-style-type: none"> <input type="checkbox"/> Fixed height or telescopic ■ ACO hygienic box channel <ul style="list-style-type: none"> <input type="checkbox"/> Channel dimension <input type="checkbox"/> Width Wo [mm]: 300, 400, 500, 600, 800 <input type="checkbox"/> Outlet øD [mm]: 142 or welded with ACO hygienic gully 157 <input type="checkbox"/> Direction of gully outlet: vertical 		
	Material grade 1.4301 (304)			416904

	Description	Used with	Weight [kg]	Item number
	Material grade 1.4404 (316L)			416905
	Silt basket ■ Stainless steel ■ 0,3 litre capacity	■ ACO gully 142 and 157 - horizontal □ Fixed height or Telescopic ■ ACO hygienic box channel □ Channel dimension □ Width Wo [mm]: 300, 400, 500, 600, 800 □ Outlet øD [mm]: 142 or welded with ACO hygienic gully 157 □ Direction of gully outlet: horizontal		
	Material grade 1.4301 (304)			416906
	Material grade 1.4404 (316L)			416907
	ACO tundish ■ Stainless steel ■ Material grade 1.4301 (304)	■ ACO gully top size 200 x 200 mm		415918
	ACO tundish ■ Stainless steel ■ Material grade 1.4301 (304)	■ ACO gully top size 250 x 250 mm		413546
	ACO tundish portable ■ Stainless steel ■ Material grade 1.4301 (304)	■ ACO drainage independent of visible edge dimensions		415821
	■ Fixed height, vertical ■ Telescopic, vertical ■ Made from 1.4404 (316) grade of stainless steel ■ NBR	■ ACO hygienic gully 157 □ Fixed height, vertical □ Telescopic, vertical		
	ACO fire resistant kit for gully 157/ DN 75			416932
	ACO fire resistant kit for gully 157/ DN 110			416933
	Odour trap Stainless steel ■ Height 50 mm	■ ACO hygienic gully 157 □ Telescopic		
	Material grade 1.4301 (304)			408200

	Description	Used with	Weight [kg]	Item number
 	Material grade 1.4404 (316L)			408210
	Standard foul air trap support NBR	<ul style="list-style-type: none"> ■ ACO hygienic gully 157 □ Fixed height □ Telescopic 		408201
	Friction ring SBR	<ul style="list-style-type: none"> ■ ACO hygienic gully 157 □ Telescopic 		408205

You can find further accessories under → <https://www.buildingdrainage.aco/search/?q=408003>