



AVK BALL VALVE, BRASS, PN16
With PRK couplings, DN25-40

343/34-001



Product description:

Ball valve with PRK couplings. For water and neutral liquids to max. 70° C

Features:


- Body of dezincification resistant brass complying with EU directive
- Solid ball of acid resistant steel with non-stick seat rings and back-up bearing of PTFE
- Two NBR stem seal O-rings ensure tightness
- Bonnet adjusted to AVK extension spindles
- The PRK coupling of acetal plastic has integrated sealing and tensile resistance
- With 12mm # operation key
- Suitable for drilling under pressure
- Suitable for drainage of water in house installations (summer cottage), to prevent frost damage.

Accessories:

AVK extension spindles, fixed (04/05), AVK extension spindles, telescopic (04/07).



Expect ... **AVR**

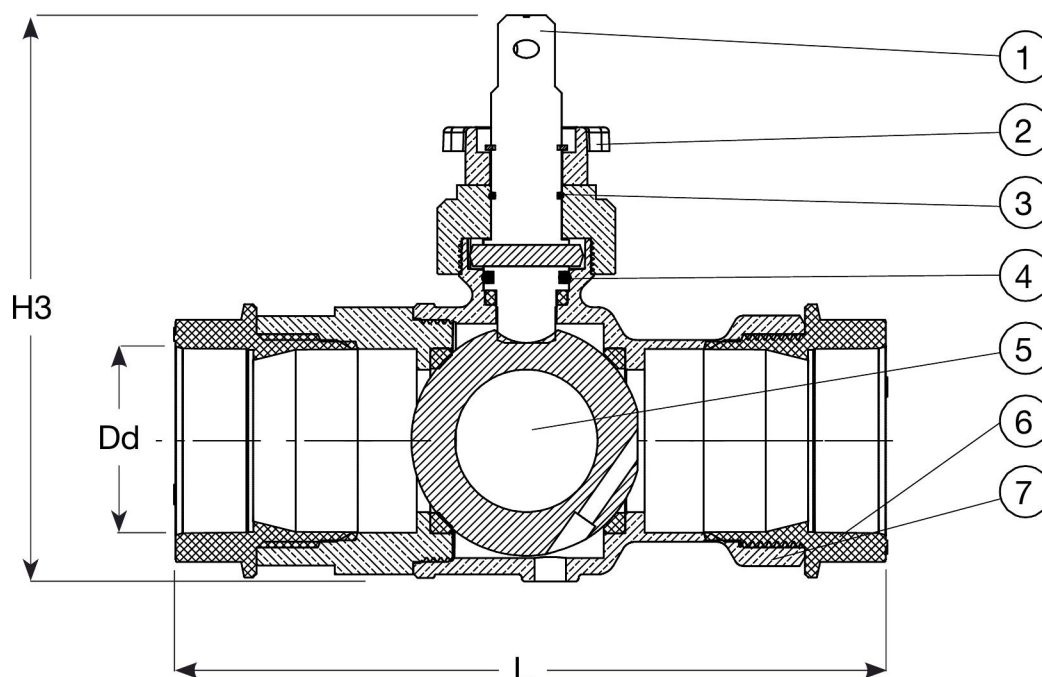

Component list:

1. Stem	Stainless steel 303	5. Ball	Stainless steel AISI 316/EN1.4401
2. Top union	Brass, DZR CW602N	6. PRK coupling	POM
3. Gasket	NBR rubber	7. Body	Brass, DZR CW625N
4. Gasket	NBR rubber		

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN	Dd	L	H3	Theoretical weight / kg
	mm	mm	mm	mm	
343-025-34-10	25	32	156	66	1.7
343-032-34-10	32	40	172	71	2.2
343-040-34-10	40	50	197	81	3.5