

Veesoojendajate ja joogivesüsteemide kaitseks.

Eelised


- Tugev valgevask-korpus.
- Lai valik.
- Iga töö jaoks alati õige ventiil.
- Suur väljalaskevõimsus tänu väljalaskefunktsioonile.
- Saab kasutada koos mis tahes vett hoidva katlasüsteemiga.

Tehnilised andmed

- Min./max. töötemperatuur: 0 °C -/ 95 °C.
- Tippkoormus: 140 °C.



Kirjeldus	Prescor B valve 3/4 x 1-8b TRD	
Tellimuse kood	27111	
EAN number	08712874271111	
Mudel	<u>Prescor B</u>	
Määratud rõhk [bar]	8,0	
Ühendus	A	Rp $\frac{3}{4}$ "
	B	Rp 1"
Mõõdud	C [mm]	76,8
	D [mm]	55,2
	F [mm]	29,5
	G [mm]	36,5
Mahutavus [kW]	150	

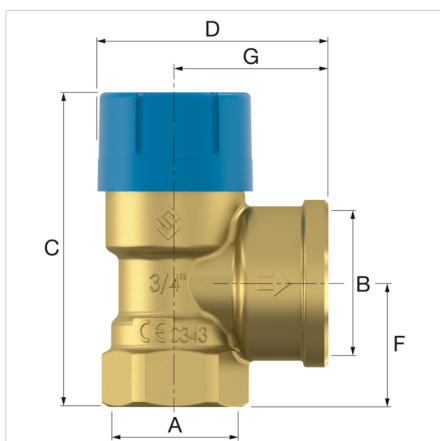

Klassifikatsioon üldandmed

Etim grupp	Measuring and control devices
Etim klass	Kaitseklapp
Toote nimi	Prescor B Rp $\frac{3}{4}$ " x Rp1" 8.0bar TRD
Kaubamärk	FLAMCO
Toote tüüp	Prescor Safety Valves (with plastic cap)
Artikkelnummer	27111
EAN number	08712874271111

Klassifikatsiooni omadused

Housing material	Brass
Nominal diameter	3/4 inch (20)
Outer pipe diameter all connections	35 Millimetre
Connection 1	Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1)
Nominal diameter connection 1	3/4 inch (20)
Outer pipe diameter connection 1	26.7 Millimetre
Connection 2	Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1)
Nominal diameter connection 2	1 inch (25)
Maximum pressure at 20 C	10 Bar
Max. operating pressure at 20 °C	10 Bar
Maks. vedeliku temperatuur (pidev)	95 Degrees celsius
Min. medium temperature (continuous)	0 Degrees celsius
Right-angled model	Yes
Bellows seal	Yes
Sealing	Ethylene-propylene diene monomer rubber (EPDM)
Overflow pressure	7.5 - 8.2 bar
Suitable for continuous operation	Yes
Length of connection 1	29.5 Millimetre
Length of connection 2	36.5 Millimetre
Kõrgus	69 Millimetre
Angle of the device	90 Degrees
Spindle angle	180 Degrees
Suitable for heating	No
Suitable for cooling	No
Suitable for hot tap water	No

Leidke võrgust rohkem teavet:[Installation and operating instructions](#)[CE PED declaration](#)[PED Module D](#)[ACS certificate](#)[Declaration of conformity UKCA](#)[Prescor B ADSK](#)[Prescor B DWG](#)[Prescor B IPT](#)[Prescor B STEP](#)[Prescor B RFA](#)[Kataloog PDF](#)

Mustamäe tee 44
10621, Tallinn - ee

T +372 568 838 38
E ee.info@aalberts-hfc.com
I flamcogroup.com/ee