


Väljalülitav ühendus liidab paisupaagi keskküttesüsteemiga ning võimaldab seadistada paagi gaasisurve või vahetada selle ilma kogu süsteemi tühjaks laskmata välja.

Tehnilised andmed

- Max töö rõhk: 10,0 bar.
- Max töötemperatuur (lubatav): 130 °C.



Kirjeldus	Flexcontrol 3/4	
TellimusB kood	28920	
EAN number	08712874289208	
Mudel	<u>FlexControl</u>	
Ühendus	A	Rp $\frac{3}{4}$ "
	B	G $\frac{3}{4}$ " F
Mõõdud C [mm]	92	
Mass [kg]	0,31	

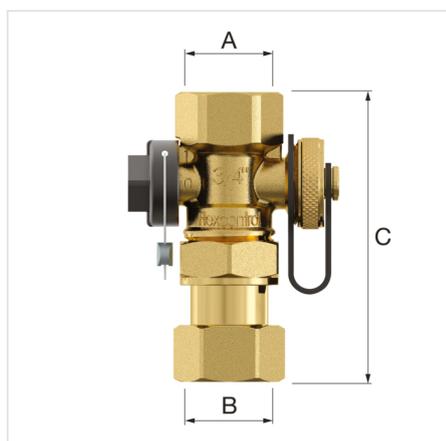



Klassifikatsioon üldandmed

Etim grupp	Measuring and control devices
Etim klass	Paisupaagi ühendusgrupp
Toote nimi	Flexcontrol 3/4
Kaubamärk	FLAMCO
Toote tüüp	Accessories
Artikelnnummer	28920
EAN number	08712874289208

Klassifikatsiooni omadused

Material	Brass
Nominal diameter	3/4 inch (20)
Outer pipe diameter connection 1	26.9 Millimetre
Connection 1	Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1)
Outer pipe diameter connection 2	26.9 Millimetre
Connection 2	Internal thread cylindrical BSPP-G (ISO 228-1)
Max. operation pressure	10 Bar
Maks. vedeliku temperatuur (pidev)	130 Degrees celsius
With pressure gauge	No
Sealable	Yes
With filling/drain tap	Yes
Right-angled model	No
Length of connection 1	16 Millimetre
Working length connection 1	14 Millimetre
Length of connection 2	16 Millimetre
Working length connection 2	14 Millimetre

Leidke võrgust rohkem teavet:

[Installation and operating instruction FlexControl](#)

[Flexcontrol ADSK](#)

[Flexcontrol DWG](#)

[Flexcontrol IPT](#)

[Flexcontrol STEP](#)

[Kataloog PDF](#)

Mustamäe tee 44
10621, Tallinn - ee

T +372 568 838 38
E ee.info@aalberts-hfc.com
I flamcogroup.com/ee