Ecostat
Bath thermostat universal for exposed installation
Surfaces: **Chrome** Article Number: **13123000**

Description

product features

- projection 194 mm
- 2 functions
- centre distance: 150 ± 12 mm
- flow rate for bath spout at 3 bar: 20 l/min
- flow rate of hand shower at 3 bar: 16 l/min
- thermostat cartridge, shut-off/ diverter valve
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety lock at 40° C
- temperature limitation adjustable
- non-return valve
- with silencer
- connection type: s-shaped connections
- connection dimension: DN15
- dirt filter included

Technology

Product image

Scale drawing

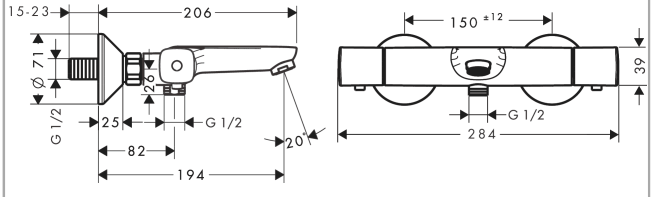

Ecostat
Bath thermostat universal for exposed installation
Surfaces: **Chrome** Article Number: **13123000**

Flowchart



① Shower outlet with 1B-resistance
② Tub outlet