

ShowerTablet Select

Bath thermostat 300 for exposed installation

Surfaces: **White/Chrome** Article Number: **13151400**



Description

product features

- projection 192 mm
- 2 functions
- simultaneous utilization by 2 outlets
- centre distance: 150 ± 12 mm
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- flow rate for bath spout at 3 bar: 20 l/min
- flow rate of hand shower at 3 bar: 16 l/min
- thermostat cartridge, Select valve
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety lock at 40° C
- temperature limitation adjustable
- with isolated water conduction
- non-return valve
- with silencer
- material handles: metal
- shelf made of safety glass
- surface of the shelf at color variant -000 = mirror glass, at color variant -400 = white glass
- in case of installation on existing G ¾ connections, adaptor no.02026000 must be used
- connection type: G ½
- connection dimension: DN15
- dirt filter included
- Thermostat is delivered with buttons hand shower and bath tub

Technology




ShowerTablet Select
Bath thermostat 300 for exposed installation
 Surfaces: **White/Chrome** Article Number: **13151400**



Product image



Scale drawing

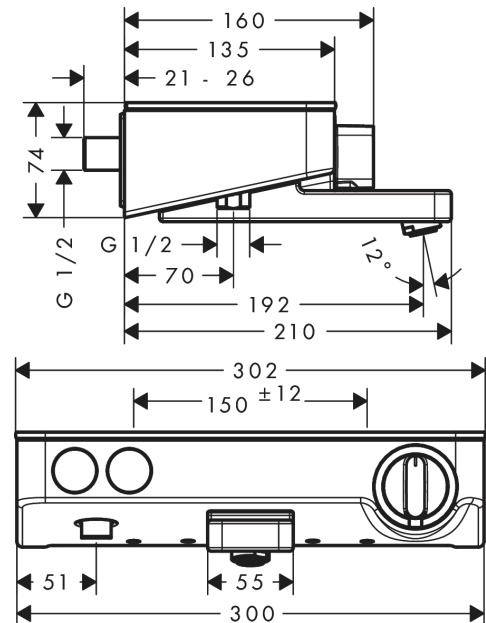

Flowchart

