

Ecostat Select

Shower thermostat for exposed installation

Surfaces: **White/Chrome** Article Number: **13161400**



Description

product features

- 1 function
- volume control for 1 outlet
- centre distance: 150 ± 12 mm
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- EcoStop button limits the water consumption to 10 l/min
- maximum flow rate at 3 bar: 12 l/min
- flow rate hand shower connection at 3 bar: 12 l/min
- thermostat cartridge, ceramic valve 180°
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety lock at 40° C
- temperature limitation adjustable
- with isolated water conduction
- non-return valve
- with silencer
- shelf made of safety glass
- in case of installation on existing G $\frac{3}{4}$ connections, adaptor no.02026000 must be used
- surface of the shelf at color variant -000 = mirror glass, at color variant -400 = white glass
- connection type: s-shaped connections
- connection dimension: DN15
- dirt filter included


Technology



Product image




Scale drawing

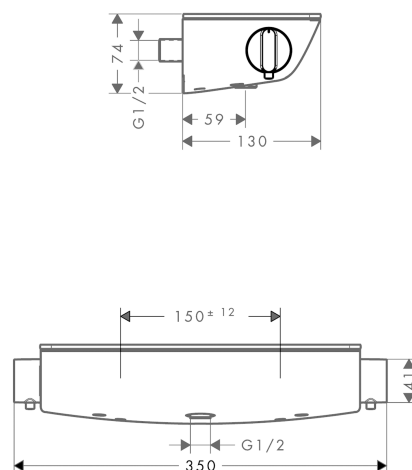

Ecostat Select
Shower thermostat for exposed installation
 Surfaces: **White/Chrome** Article Number: **13161400**



Flowchart

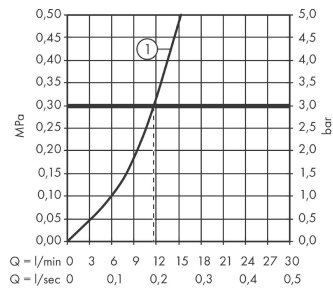

Shower outlet with 1B-resistance