

Ecostat E

Shower thermostat for exposed installation

Surfaces: **Chrome** Article Number: **15773000**



Description

product features

- 1 function
- centre distance: 150 ± 12 mm
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- EcoStop button limits the water consumption to 9 l/min
- maximum flow rate at 3 bar: 28.6 l/min
- thermostat cartridge
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety lock at 40° C
- temperature limitation adjustable
- non-return valve
- with silencer
- suitable for continuous flow water heaters
- material handles: metal
- connection type: s-shaped connections
- connection dimension: G $\frac{1}{2}$
- dirt filter included


Technology



Product image



Scale drawing

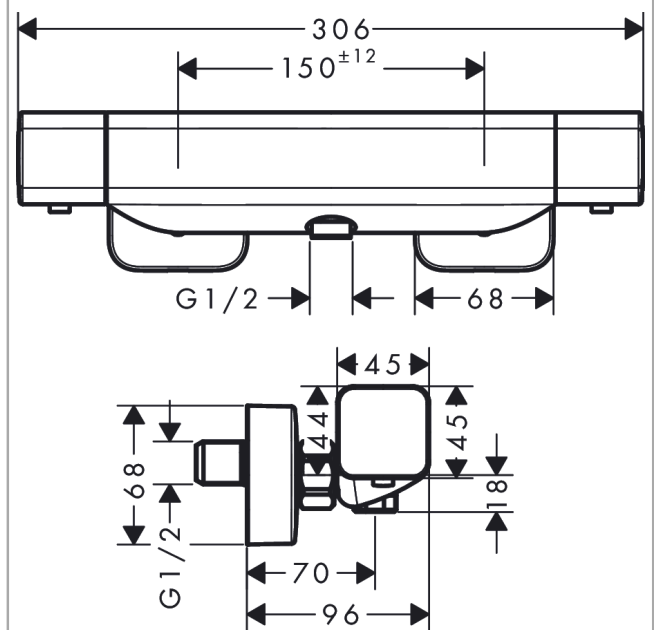

Ecostat E

Shower thermostat for exposed installation

Surfaces: **Chrome** Article Number: **15773000**



Flowchart

