



# TIEMME


## RACCORDERIA GENERICA GENERIC FITTINGS

### Serie 1551

Raccordo dritto maschio/femmina  
*Straight fitting M/F connector*

La raccorderia generica Tiemme si adatta ad ogni tipo di impianto idraulico domestico e commerciale, applicazioni industriali ed agricole, impianti di riscaldamento, igienico sanitari e generalmente con ogni fluido non corrosivo.

*The brass generic fittings are suitable for domestic and commercial plumbing, industrial, agricultural application and generally with every non aggressive fluid.*

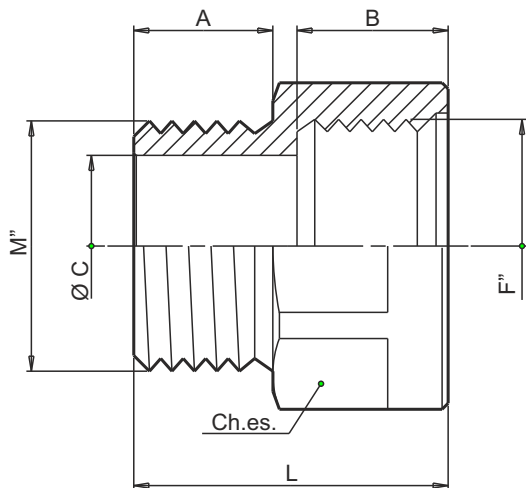

#### Caratteristiche Tecniche

Temperatura max di esercizio: 200°C  
Temperatura min di esercizio: -20°C  
Pressione max di esercizio: 30 bar  
Filettature: maschio UNI ISO 228  
femmina UNI ISO 228

#### Technical Features

Maximum temperature: 200°C  
Minimum temperature: -20°C  
Maximum operating pressure: 30 bar  
Threads: male UNI ISO 228  
female UNI ISO 228

#### Descrizione

Corpo

#### Materiale

Ottone CW617N - EN12165

#### Description


Body

#### Material

CW617N - EN12165 brass

Tabella dimensioni  
*Sizes table*

M	F	CODICE / CODE	L	A	B	ØC	Ch.es.
1/4"	3/8"	1500861	22,0	9	10	8	21
1/4"	1/2"	1500862	24,5	9	12,5	8	27
3/8"	3/8"	1500529	23,0	10	10	12	21
3/8"	1/2"	1500106	24,5	10	12,5	12	24
3/8"	1"	1500581	28,5	10	12,5	12	ott. 37,5
1/2"	3/8"	1500305	22,5	11,5	10	15	22
1/2"	1/2"	1500259	26,0	11,5	12,5	15	24
1/2"	3/4"	1500043	26,5	11,5	13	15	31
1/2"	1"	1500158	30,0	11,5	15,5	15	37
3/4"	1/2"	1500140	26,0	13	12	19	27,5
3/4"	3/4"	1500185	26,5	11	13	21	31
3/4"	1"	1500053	30,5	12	15,5	20,5	37
1"	3/4"	1500165	30,0	15	13	25,5	37
1"	1"	1500272	30,5	12	15,5	25,5	37
1"	1"1/4	1500863	40,0	15	21	25,5	50
1"1/4	1"1/2	1500864	46,0	18	23	32	60

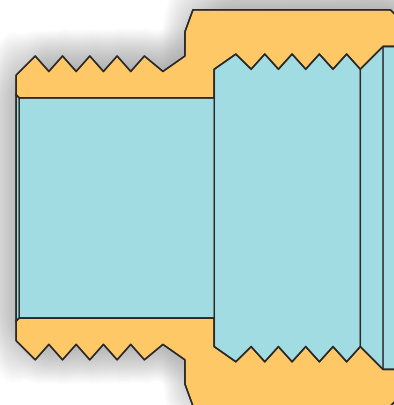

TIEMME Raccorderie S.p.A.  
Via Cavallera 6/A (Loc. Barco) - 25045 Castegnato (Bs) - Italy  
Tel +39 030 2142211 R.A. - Fax +39 030 2142206  
info@tiemme.com - www.tiemme.com

