

EAN: 6414150097010  
[static.oras.com/4802F](http://static.oras.com/4802F)



- Washbasin
- Single-lever, Bidetta
- Deck mounted
- Chrome
- Fixed spout
- PCA® - constant flow rate regardless of pressure variations, Adjustable flow angle
- Single operating lever/handle, Hot/Cold symbols
- Shower holder, Shower hose (1600 mm)
- Bidetta hand shower
- $\varnothing$  40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass
- Without pop-up waste

## Technical data

### Flow properties

Flow-rate at 300 kPa (with flow controller)	<b>0.07 l/s</b>
Pressure loss with flow (0.1 l/s)	<b>170 kPa</b>

### Technical properties


Hot water supply	<b>max. +70°C</b>
Working pressure	<b>50 - 1000 kPa</b>
Connection size	<b>G3/8</b>
Projection	<b>200 mm</b>
Backflow prevention (EN1717)	<b>HC</b>
Material	<b>Brass</b>



### Regulations

EN standard	<b>EN 817</b>
Noise class	<b>I (ISO 3822)</b>


### Approvals and Declarations

STF certificate	<b>EUF129-21003824-TH</b>
KIWA SE	<b>1746</b>

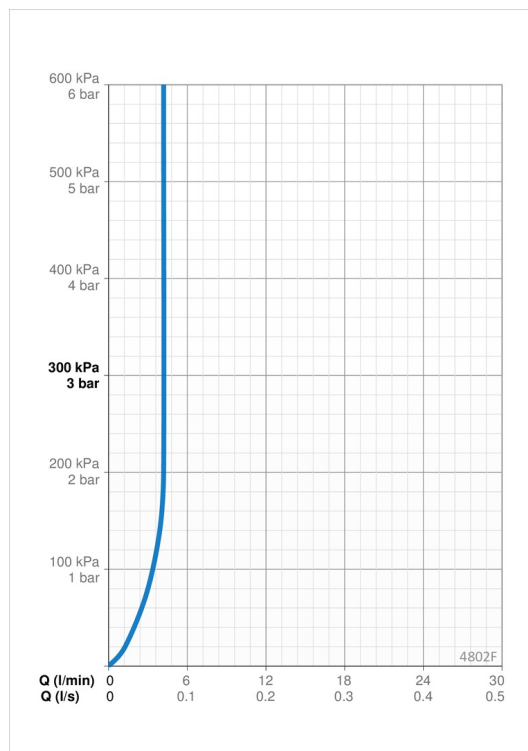

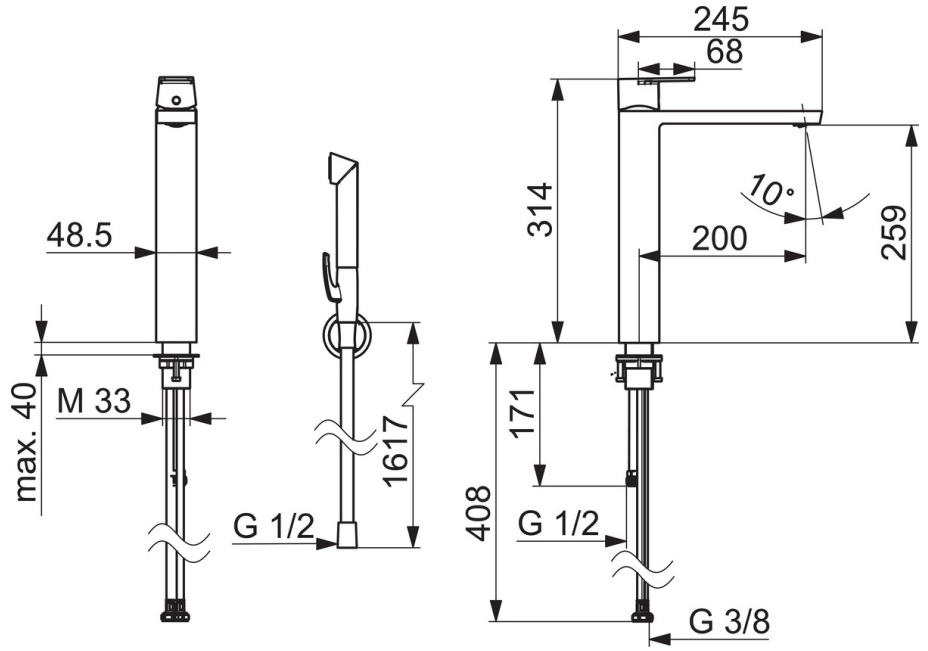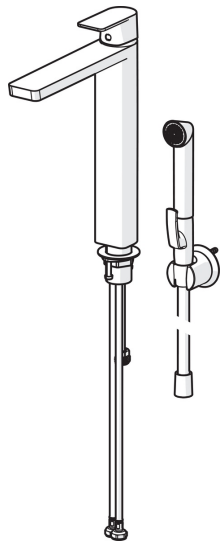

### Spare parts

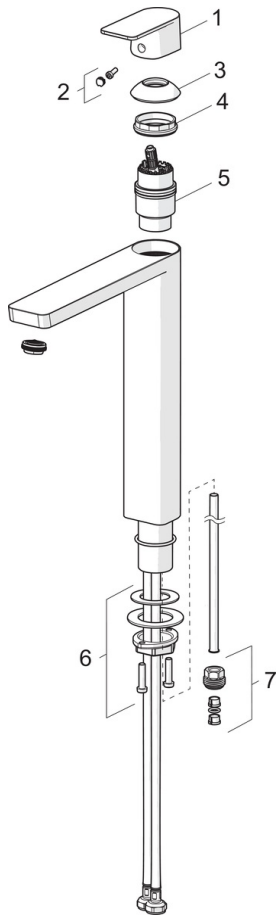

#### SP4802F

	Name	Code
01	Lever	1006282V
02	Symbol plug	1002323V
03	Covering cap	1001740V
04	Tightening nut	158726
05	Cartridge	158890
06	Fixing set	602629V
07	Nipple	159684